

# RPKI deployment experience in Japan

Taiji Kimura

## Agenda



- How RPKI is explained in Japan
- Deployment status
- FAQ and a hot issue

# How RPKI is explained in Japan(1)

- **BGP**

Allocated ASN 95,230

The 32-bit AS Number Report  
<http://www.potaroo.net/tools/asn32/>

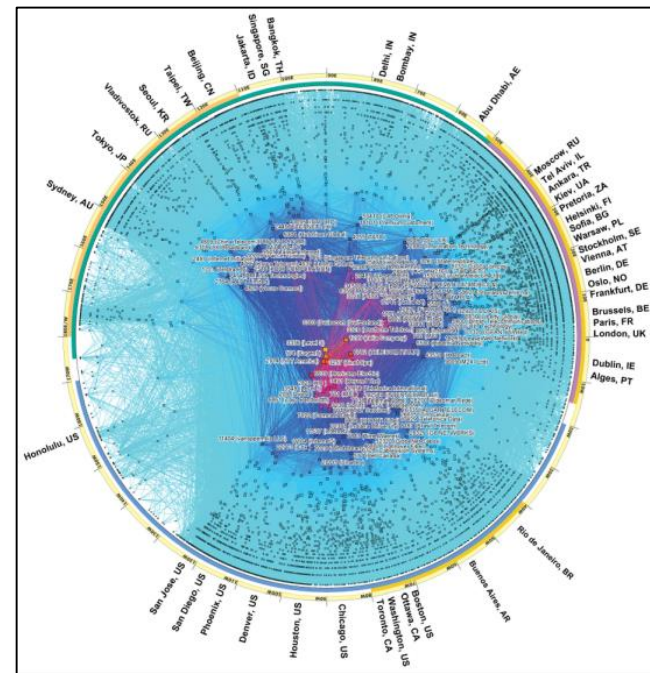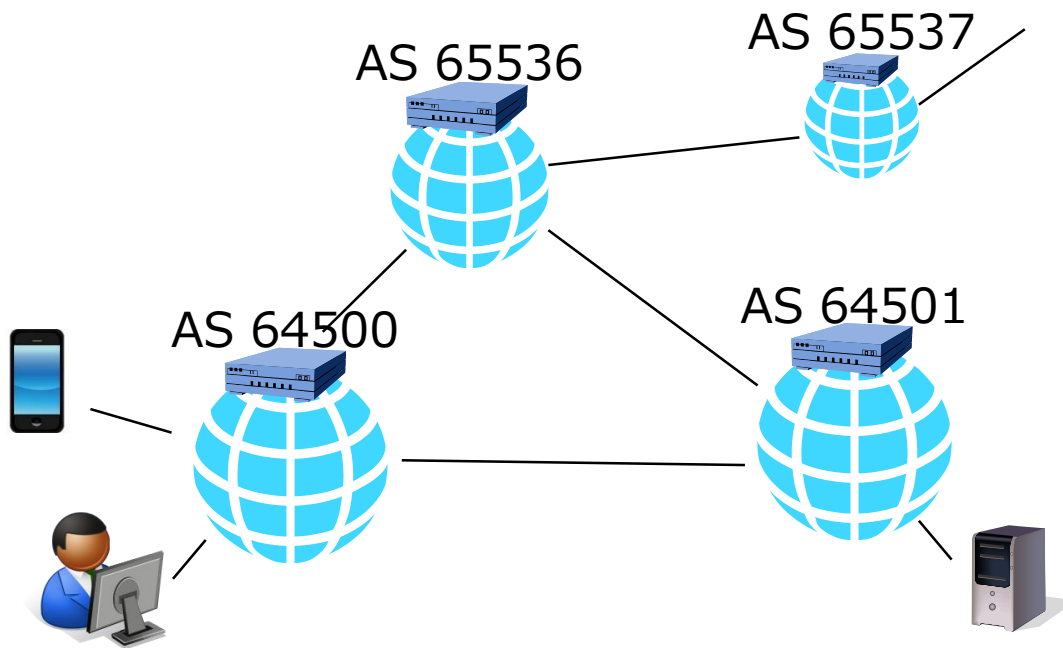

CAIDA's IPv6 AS Core AS-Level Internet Graph  
[http://www.caida.org/research/topology/as\\_core\\_network/](http://www.caida.org/research/topology/as_core_network/)

**IP address prefix accommodated in a AS is announced to other AS via BGP.**


# How RPKI is explained in Japan(2)

- **MyEtherWallet.com**
  - What observed
    - AWS Route 53's prefix originally /23 was announced as /24
    - A DNS server in the prefix made forged DNS response for MyEtherWallet.com
    - The web server has self-signed certificate (EV SSL certificate is used on the original server)
  - What happened
    - \$150,000 in Ethereum was sent abnormally

**Mis-originated BGP prefix was used to redirect to a phishing site.**

- MyEtherWallet、DNSサーバーにハッキング、15万ドル分のETH盗難か  
<https://jp.cointelegraph.com/news/myetherwallet-warns-that-a-couple-of-its-dns-servers-have-been-hacked>
- AWS DNS network hijack turns MyEtherWallet into ThievesEtherWallet - The Register, 2018/4/24  
[https://www.theregister.co.uk/2018/04/24/myetherwallet\\_dns\\_hijack/](https://www.theregister.co.uk/2018/04/24/myetherwallet_dns_hijack/)


# How RPKI is explained in Japan(3)

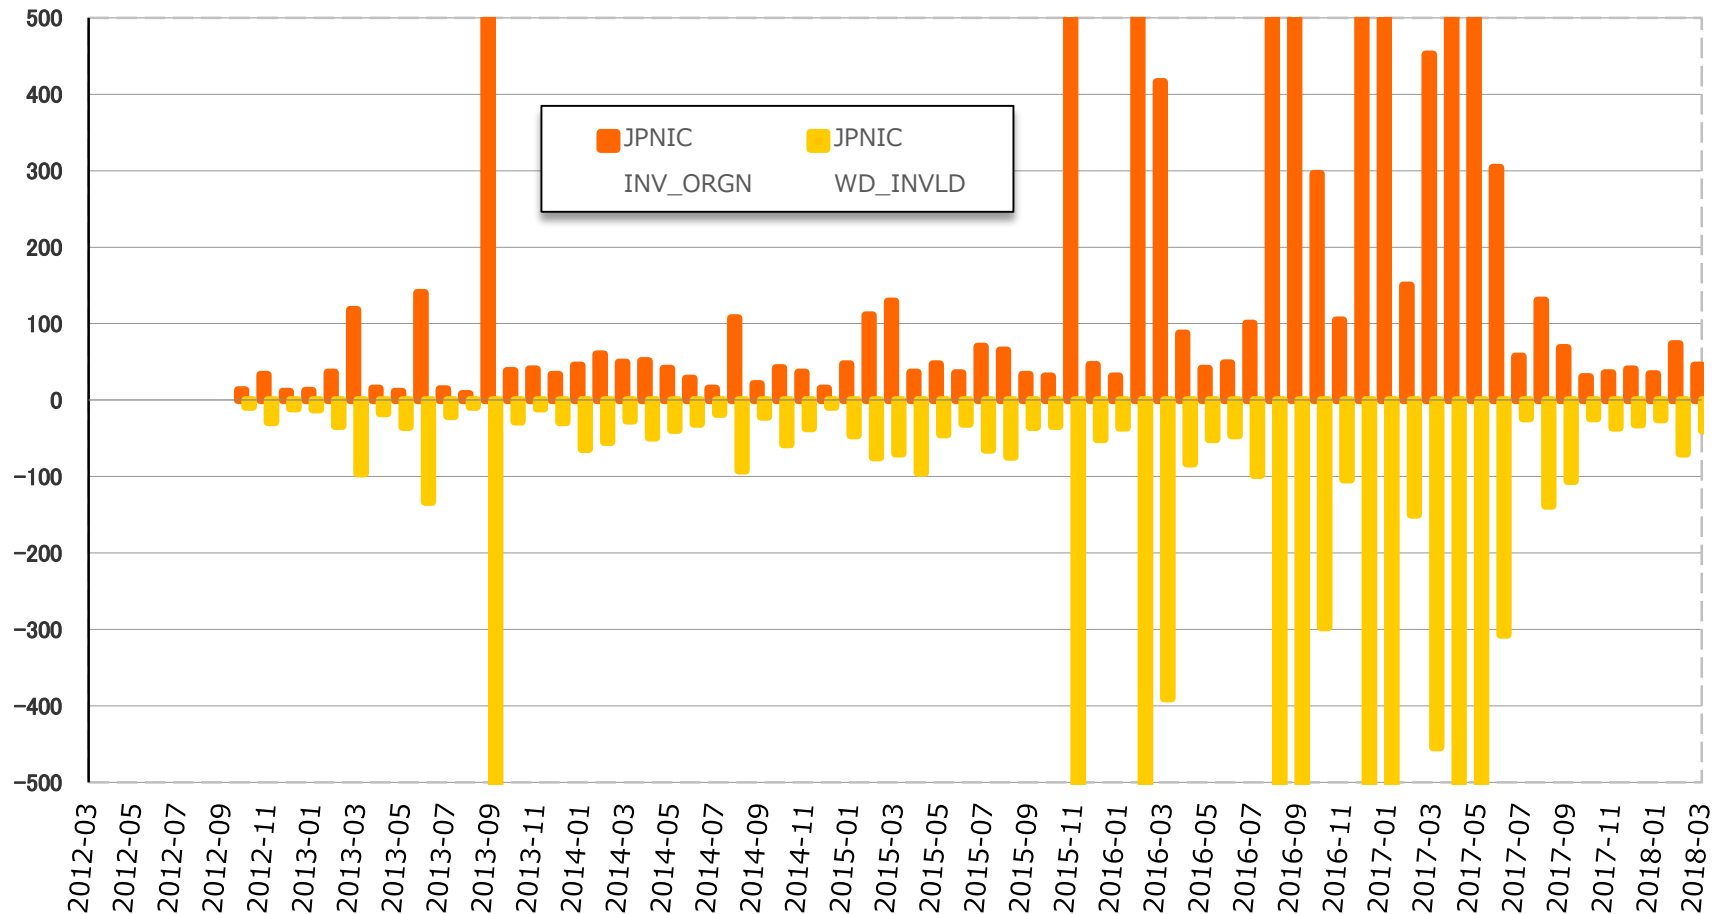

**Mis-originated route (compared with route object registered in JPIRR) is detected regularly.**

# RPKI and ROA

- **Resource Public-Key Infrastructure**
  - A PKI for certify number resource allocations
- **Route Origination Authorization**
  - Signed object expressing an AS is authorized by resource holder to announce prefixes.
  - ROA can be used to compare BGP route to find mis-originated routes.

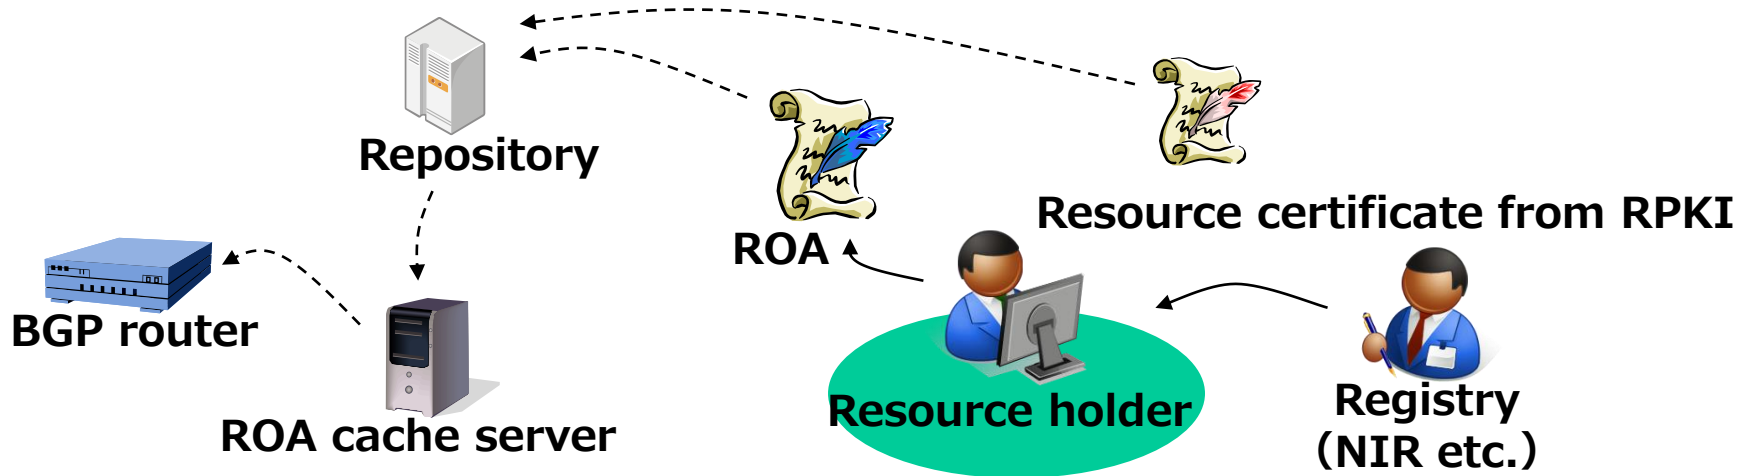

# Origin validation using ROA

---

- **You can find mis-originated routes from Internet or customer.**
  - You may change priority of the route with preference value.

**Only when resource holder issued ROA correctly.**

# Deployment status



- **Resource holder**

- 60


- **ROA**

- 248

- **Covering rate**

- 3.3% IPv4

- 38.1% IPv6

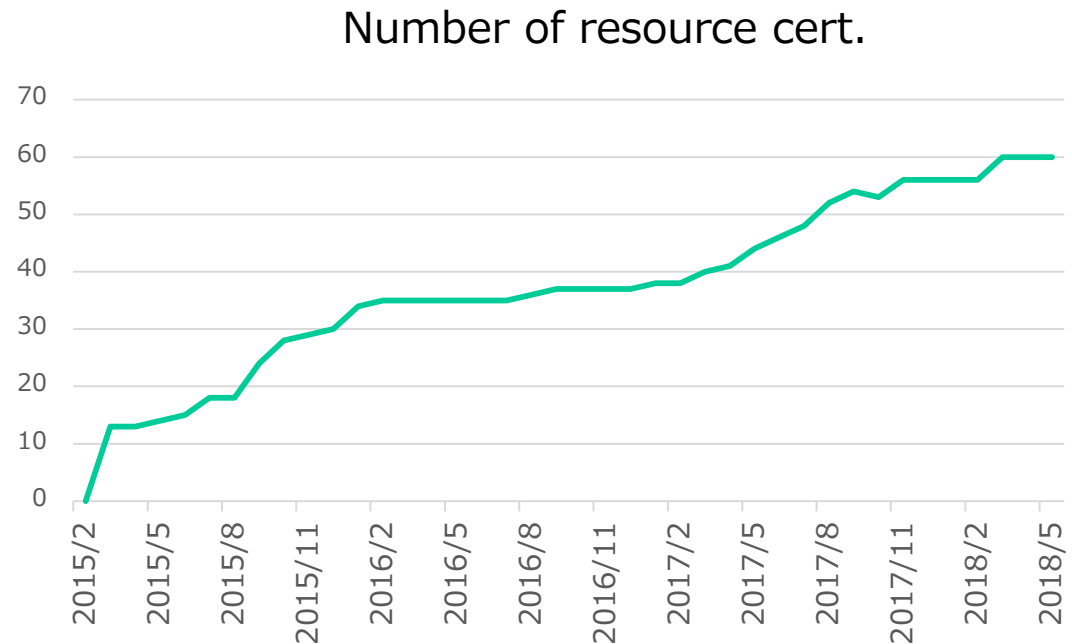

**RPKI seminar in regular basis. The number of holders is increasing slowly.**

# FAQ1

---

- Q. I don't know which AS is announcing our IP address prefix...
- A. Without ROA, mis-originated prefix cannot be found easily. Please consider to find correct AS this time.



# FAQ2

---

Q. Some prefixes are used internally and not announced to the Internet.

A. ROA with AS "0" can express the prefix is not announced. It might help your historical address when other AS announced the prefix for sending spam or other malicious actions.

# A hot issue

---

Q. An AS in Europe did not accept our prefix because ROA had shorter prefix length from announced prefix. What should we do?

A. It means that ROA management is getting more important than ever. And communication between customer support and network engineer also. (A customer reported this issue to ISP in this case.)